


QUIK GUN™ CARE, CLEANING AND TROUBLE SHOOTING

THE QUIK GUN™ IS DESIGNED TO APPLY TEMP-COAT® ON SMALL JOBS AND IN TIGHT, HARD TO REACH PLACES. This inexpensive, low pressure high volume gun is a siphon type object which is powered by an air compressor which will maintain 80 PSI delivered through a 3/8 inch air hose to the gun.

Because TEMP-COAT® IS A VERY DRY PRODUCT, the volume of air used to siphon the product to the delivery valve will occasionally dry the product at the point of mixing. At this time and at the time of storage, the delivery valve should be cleaned and prepared for the next use.

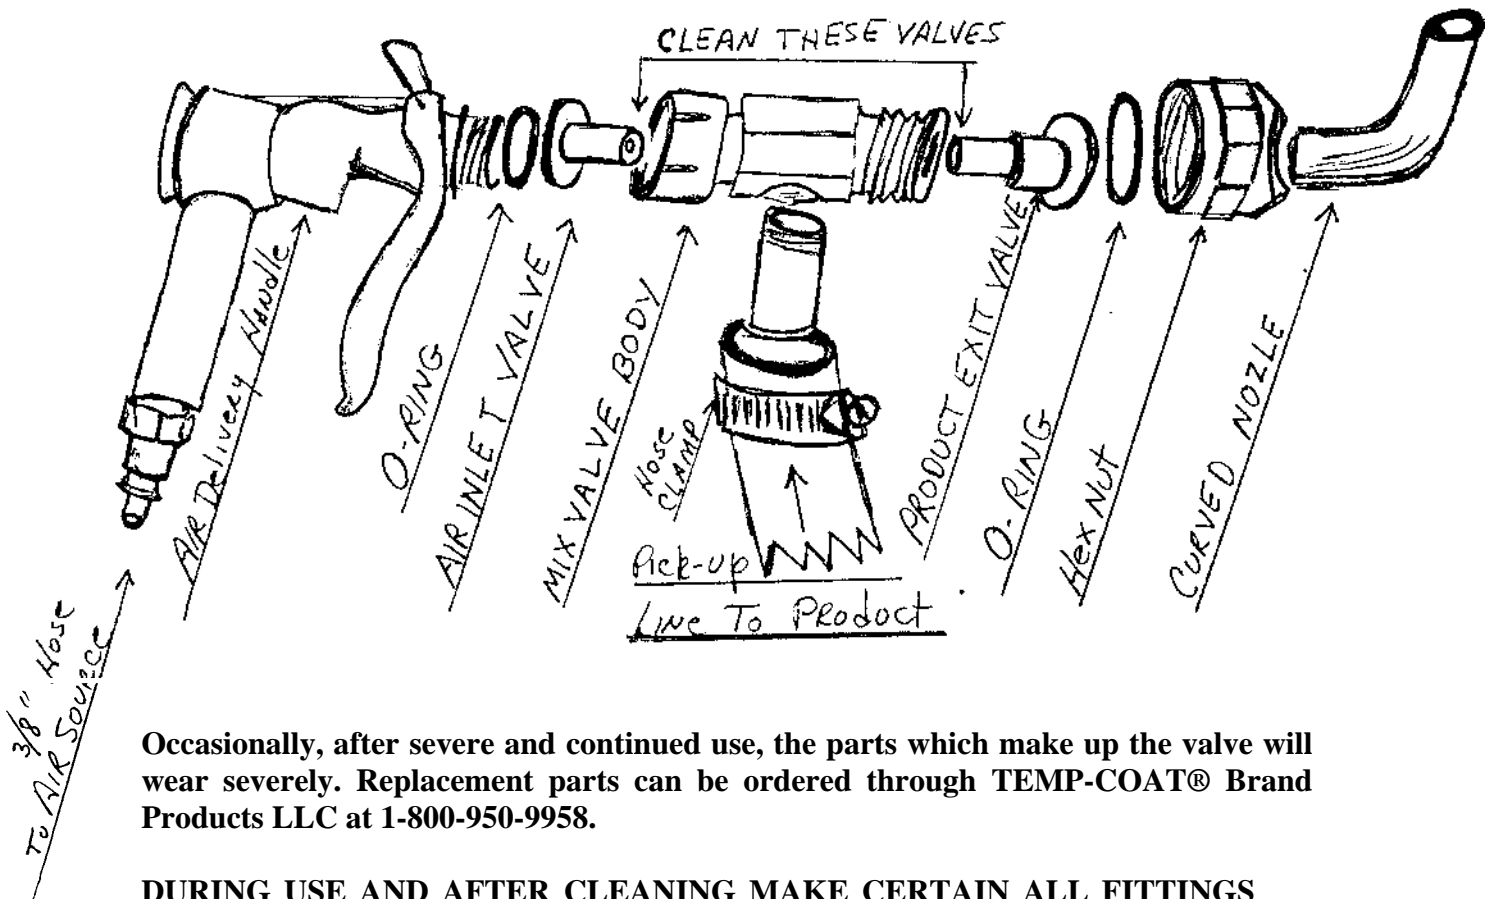

Occasionally, after severe and continued use, the parts which make up the valve will wear severely. Replacement parts can be ordered through TEMP-COAT® Brand Products LLC at 1-800-950-9958.

DURING USE AND AFTER CLEANING MAKE CERTAIN ALL FITTINGS ARE SNUG. LOOSE FITTINGS WILL CAUSE SUCTION LOSS WHICH REDUCES THE VACUUM PRESSURE PICKING UP THE PRODUCT.

If all fittings are snug and the valves are clean and product will not pick up, it could be that the product needs to be thinned slightly. Add up to 12 oz. of water per 5-gallon pail to achieve this purpose.

For questions or instructions please do not hesitate to call 1-800-950-9958.

THANK YOU FOR CHOOSING TEMP-COAT® Brand products.